


multiGuard®

can also be used for:

Monitoring of freezers and cold rooms

Monitor temperature in freezers and cold rooms. If the temperature rises above a specified level, an alarm is sent. It is possible to filter out defrost cycles. Alarm is sent as a text message. All current and past measurements can be retrieved via the internet.

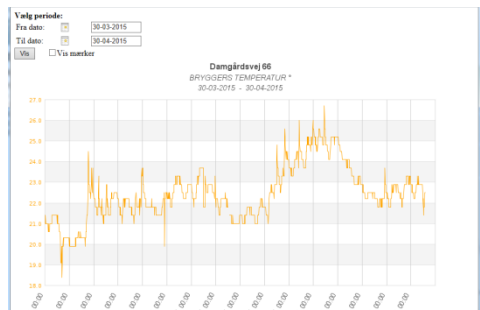

A system for monitoring e.g. 4 cold rooms consists of:



multiGuard® Max
 Profort no. 007025



4 x flexSpot IP 65
 Profort no. 007566



4 x PT1000 sensor
 No. 57.05150.074424



9V Accu for power failure
 No. 40.08496.550814

Go to <http://www.profort.com/cold-room/>

The multiGuard® series

has many areas of use, e.g.:

Controlling heat pumps



Controlling irrigation



Alarm from slurry tanks



Climate monitoring of art and artifacts



Monitoring of temperature and power in server rooms



Monitoring of pump well levels



Monitoring of temperature and humidity in construction



Gate opening control

