

Data sheet for Temperature and humidity sensor 50cm



DESCRIPTION

Digital temperature and humidity probe. The probe connects to Profort GSM units or Profort wireless transmitter via mini-USB connector.


The unit must be mounted indoors or under the gable. Do not expose to rain or water.

Especially suited for:

- Measuring / logging of temperature and humidity in air
- Measuring / logging of temperature and humidity in masonry
- Measuring / logging of temperature and humidity in floors

SPECIFICATIONS

The sensor is calibrated from the factory and has the following tolerances:

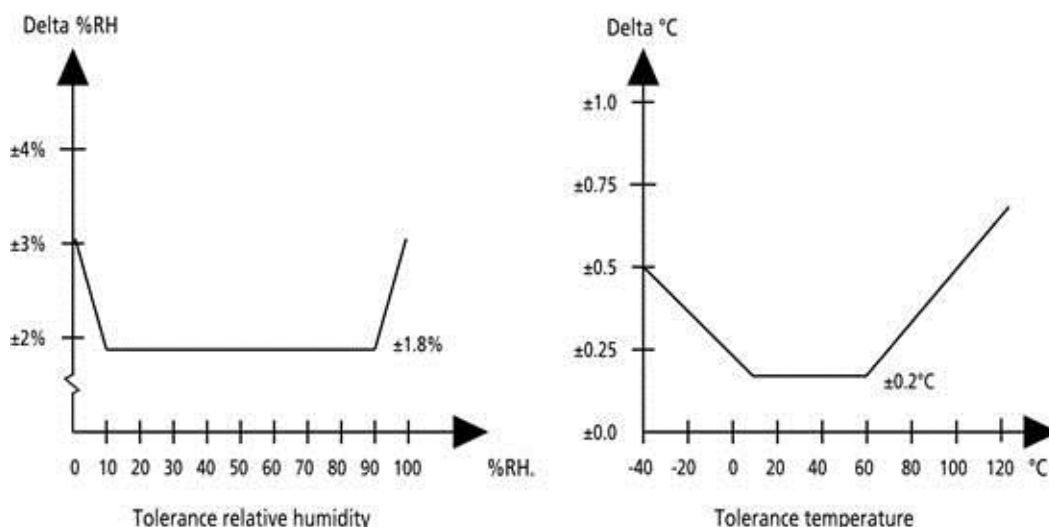

Data:

- Humidity deviation: <0,5 %/year
- Temperature deviation: <0,04°C/year
- Length: 50cm
- Probe diameter.: 6mm