


# Data Sheet multiGuard DIN6, 4G

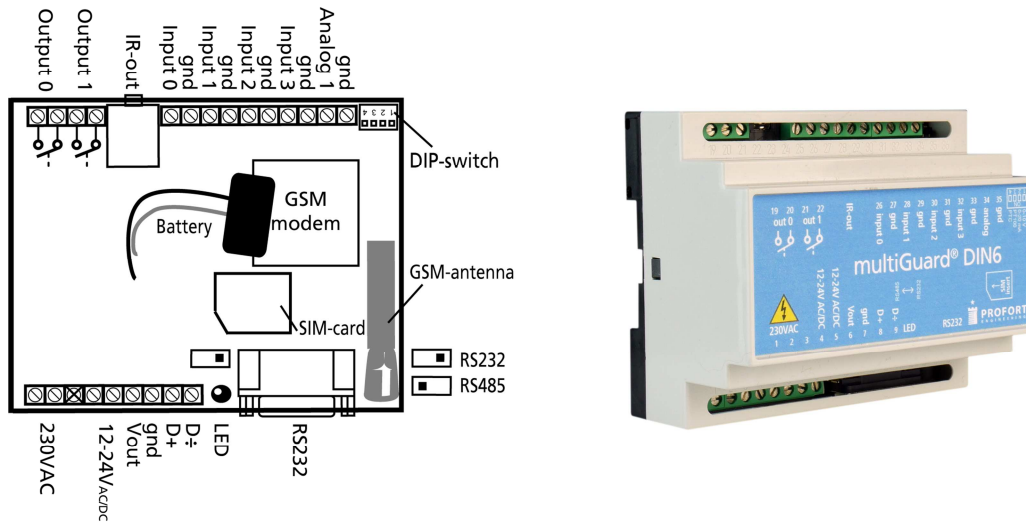

## DESCRIPTION

The 6 modules GSM unit is adapted to remote controlled management, measurement and collection of technical alarms via 2G, 3G or 4G mobile network. Developed for panel mounting on DIN-rail. Is able to control electrical functions by activation of relays via text messages, phone calls or the Profort portal on the Internet. Gives alarm as text message, email or DTMF call by influence of alarm inputs. Is able to measure e.g. temperature, pressure and humidity with analogous measuring equipment, log the measurements, notify in case of voltage errors and when the voltage returns.

6 modules is the unit with combined 230VAC / 12-24VAC/DC power supply. The unit has the option of connection with a 9 V rechargeable battery and has a 10VDC outlet for supply of e.g. external units or RS485 interface (e.g. MODBUS).

### Particularly suitable for:

- Irrigation
- Alarm, slurry tanks
- Light control
- Control of pump wells
- Alarm as text message and DTMF-tones for 25 receivers
- 2 relay outputs for activation of e.g. contactors
- Management via the Profort web-portal and app for smartphone
- Built-in clock and calendar for light control and alarm

## SPECIFICATIONS

<b>Relay outputs</b>	2	Max strain: 6A ved 230VAC/35VDC
<b>Digital inputs</b>	4	
Both gnd/24VDC activation	Yes	
Digital input high (gnd)	Interrupted or min 3VDC – max 12VDC	
Digital input low (gnd)	Max 1V, 2mA	
Digital input high (24VDC)	Min 18VDC – max 30VDC, 2 mA	
Digital input low (24VDC)	Interrupted or max 1VDC	
Galvanic separation	Yes	
Input 0	Alarm or connection/disconnection (pulse or level from bypass switch)	
Input 1	Alarm or pulse/minute counter (max. 10 Hz, 6 numbers)	
Input 2	Alarm or pulse counter (max. 10 Hz, 6 numbers)	
Input 3	Alarm or pulse counter (max. 10 Hz, 6 numbers)	
<b>Analogue input</b>	1	
Input 1	0-10 V, 0/4-20 mA, PT100 or Profort temperature sensor PTC or as digital input	

---

<b>Supply</b>	230V AC/DC, 12-24 V AC/DC, $\pm 10\%$ min. 0,5 A. Supply must not be grounded.
Power supply included	No
Battery	Internal rechargeable NiMH (acquisition)
10VDC output	Yes, max 100mA

---

<b>Dimensions</b>	
Design	DIN-rail – 6 modules
Size	114x86x57mm
Weight	290g

---

<b>Power consumption, typically</b>	
– rest	30 mA (12VDC supply)
– both relays activated	40 mA (12VDC supply)

---

<b>Antenna</b>	
Internal	Interior
External	Mounting via SMA-plug option

---

<b>Temperature</b>	
Operation	$\pm 20-55$ °C
Stock	$\pm 30-65$ °C

---

#### Other connections

RS232 for connection with PC or PLC  
RS485 for connection with e.g. MODBUS  
Jack for IR output  
Plug for battery  
Plug for SIM micro-card

---

## FUNCTIONS

---

#### Alarm receivers

Number 25 (up to 8 zones/areas)  
Text message  
E-mail (depending on operator)  
Call with DTMF-tones  
Via Internet  
SIA-IP protocol  
Set-up only for acknowledged users  
Alarm for latest user  
Easy change of receiver order  
Acknowledgement of alarm reception in case of call with DTMF-tones

---

#### Log

Analogue log, measurement every ½ hour	24.576 (e.g. 16 months history for one input)
Event log, alarm and set-up	256

---

#### Programming

PC program	Quick set-up connected via RS232 or GPRS/Internet
Text message	send text from mobile telephone
The Profort web-portal	via <a href="http://www.masterview.dk">www.masterview.dk</a>

---

#### Other functions

Calendar:	36 activities (every weekday, specific date)
Delayed connection:	30 sec. connection/disconnection in surveilled zone
Filter time on inputs:	10 sec. – 64 hours
Alarm only every 15 min.	Used with e.g. PIR movement sensor
Power alarm:	Never, immediately or after 30 min.

---